


Flex System Door & IO Module

Part number: FS-DC01


Pro Enterprise

The Door & IO module is used for controlling a door strike. In addition, it offers input and output lines compatible with indicators, alarms, door sensors, request-to-exit devices, and compatible Wiegand input devices.

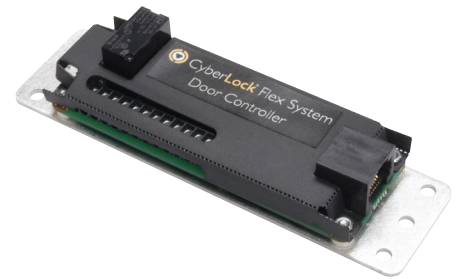

Specifications

Physical	Aluminum plate
Operating Temperatures	14° to 140° F, -10° to 60° C
Humidity	0 to 90% non-condensing
Dimensions	5" L x 1.375" W x 1" H (127 mm x 35 mm x 25.3 mm)
Weight	2.1 oz (59.5 g)
Power	Via RS485, CAT 5 patch cable from a Flex System Hub
Connections	RJ45

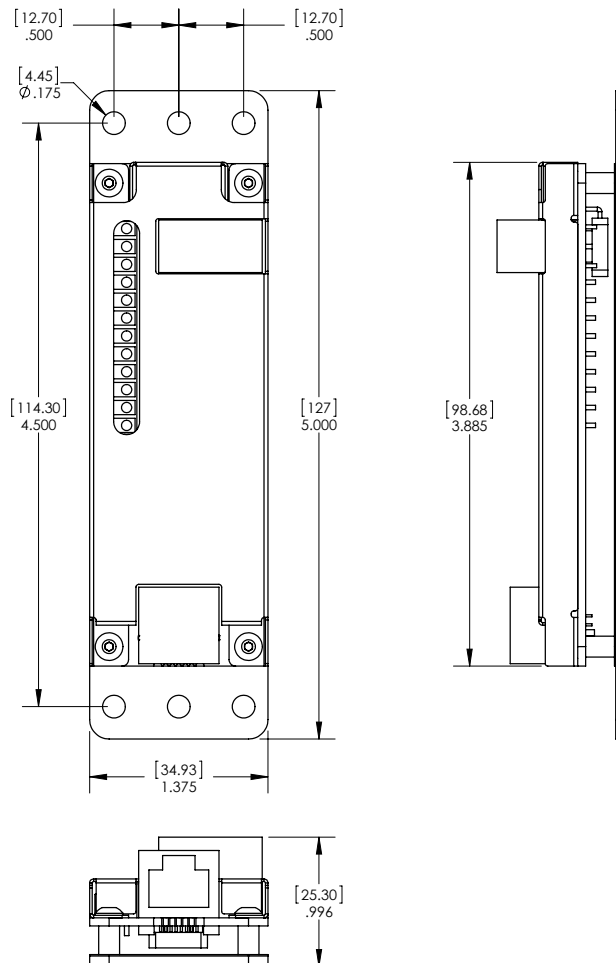

Notes:
 Dimensions in inches (mm)
 Drawing not to scale
 Ø indicates diameter